

UNICO[®]
TILES

Grow Together with Clay Creations



800mm x 1600mm

GLAZED PORCELAIN TILES
WITH DIGITAL PRINT

COLLECTION
2020



THICKNESS

9 MM

SERIES



GEM COLLECTION

FINISH

HIGH GLOSS

EARTH BEIGE

800 X 1600 MM

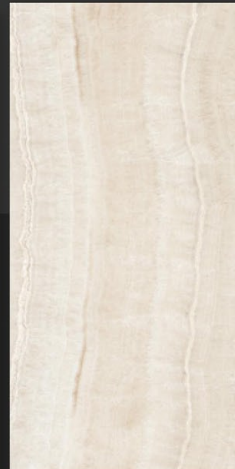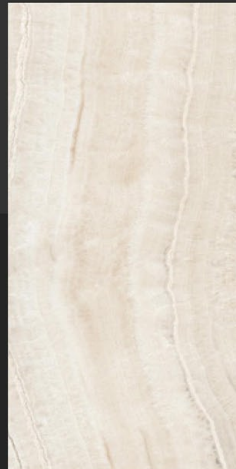





THICKNESS

9 MM

SERIES


GEM COLLECTION

FINISH

HIGH GLOSS

TRAVERTINO CARK

800 X 1600 MM

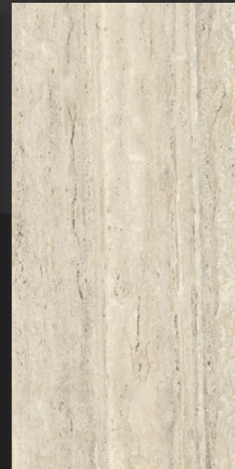





THICKNESS

9 MM

SERIES

GEM COLLECTION

FINISH

HIGH GLOSS

ARMANI GRIZLY

800 X 1600 MM







THICKNESS

9 MM

SERIES


GEM COLLECTION

FINISH

HIGH GLOSS

BERLINE BEIGE

800 X 1600 MM

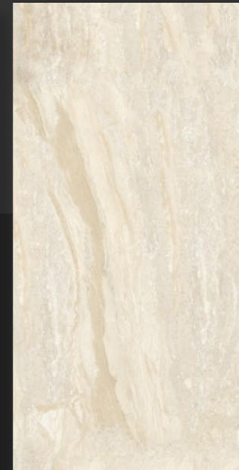





THICKNESS

9 MM

SERIES




GEM COLLECTION

FINISH

HIGH GLOSS

BOTTOCHINO BRIGHT

800 X 1600 MM

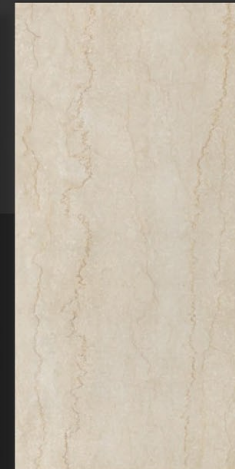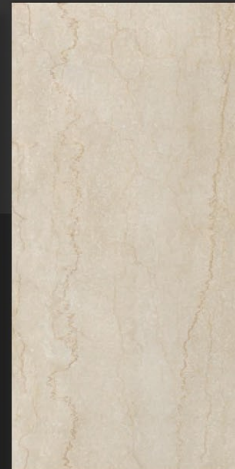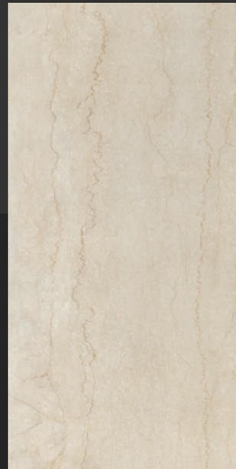





THICKNESS

9 MM

SERIES

GEM COLLECTION

FINISH

HIGH GLOSS

BRECCIA AURORA

800 X 1600 MM







THICKNESS

9 MM

SERIES




GEM COLLECTION

FINISH

HIGH GLOSS

BRECCIA FANTASTIC

800 X 1600 MM

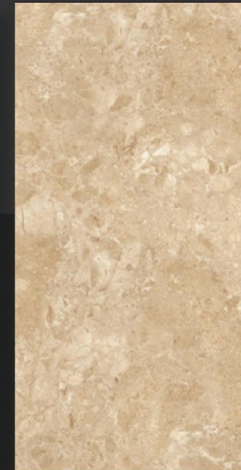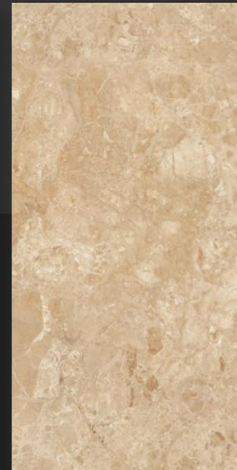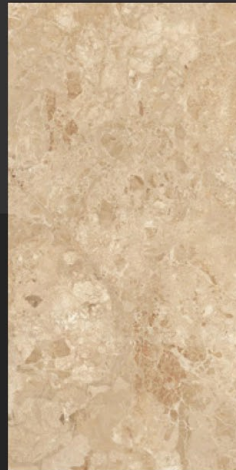





THICKNESS

9 MM

SERIES


GEM COLLECTION

FINISH

HIGH GLOSS

BRECCIA MINK

800 X 1600 MM

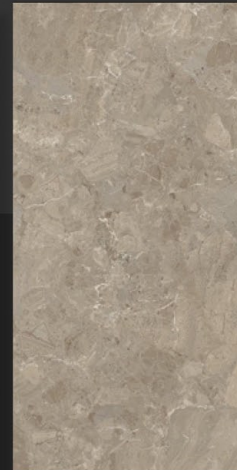





THICKNESS

9 MM

SERIES




GEM COLLECTION

FINISH


HIGH GLOSS

BRECCIA SANDY BOOK MATCH

800 X 1600 MM

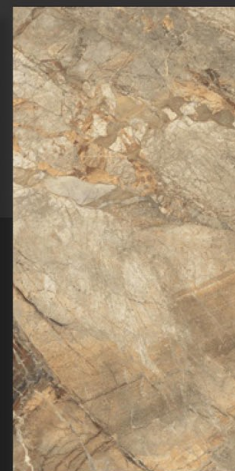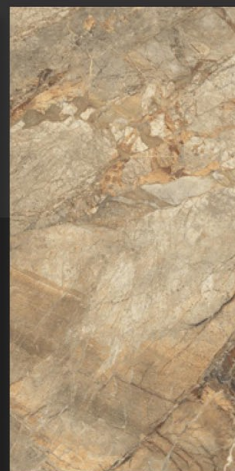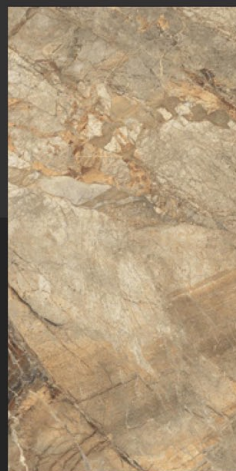



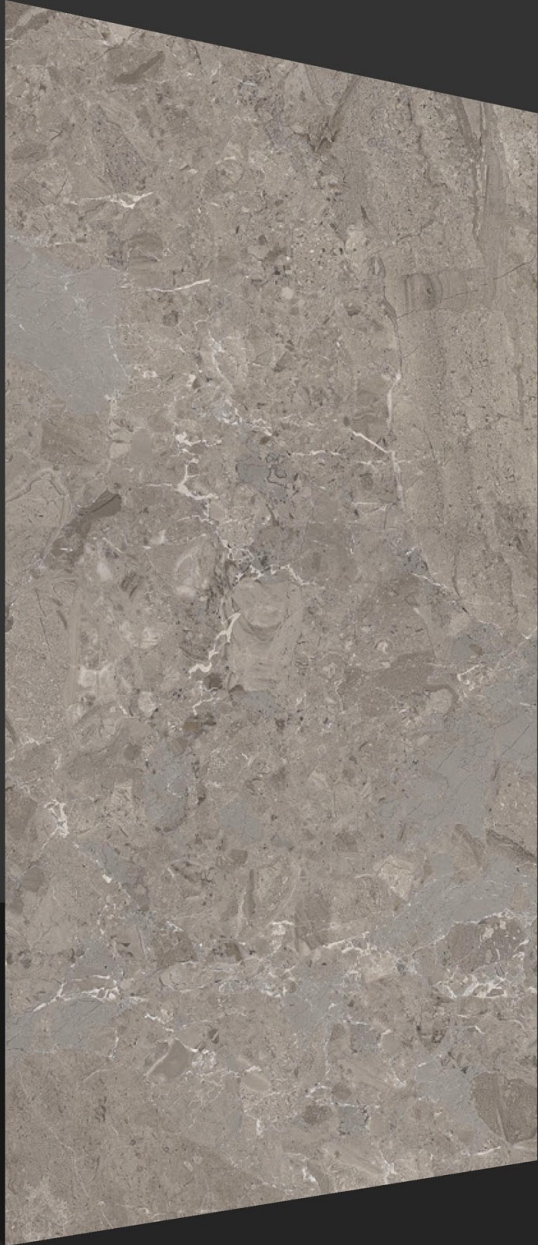

THICKNESS

9 MM

SERIES

GEM COLLECTION

FINISH

HIGH GLOSS

BRECCIA STEEL

800 X 1600 MM







THICKNESS

9 MM

SERIES


GEM COLLECTION

FINISH

HIGH GLOSS

CALACUTTA CREMA

800 X 1600 MM

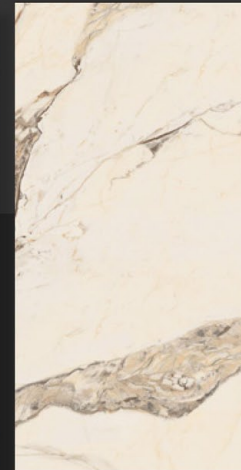



TEST DESCRIPTION	TEST METHOD	ISO STANDARD 13006 B1a TILES	VALUE
Length and width	BS EN ISO 10545-2	± 0.6%	± 0.3%
Thickness	BS EN ISO 10545-2	± 5.0%	± 3.0%
Straightness of sides	BS EN ISO 10545-2	± 0.5%	± 0.3%
Rectangularity	BS EN ISO 10545-2	± 0.6%	± 0.3%
Surface flatness	BS EN ISO 10545-2	± 0.5%	± 0.3%
Water absorption	BS EN ISO 10545-3	≤ 0.5%	≤ 0.05%
Breaking strength	BS EN ISO 10545-4	≥ 1300N	≥ 1500N
Modulus of rupture	BS EN ISO 10545-4	≥ 35 N/mm ²	≥ 45N/mm ²
Resistance to deep abrasion	BS EN ISO 10545-6	≤ 175mm ³	≤ 150mm ³
Linear thermal expansion	BS EN ISO 10545-8	≤ 9 x 10 ⁻⁶ °C ⁻¹	≤ 7 x 10 ⁻⁶ °C ⁻¹
Thermal shock resistance	BS EN ISO 10545-9	No visible defect	No visible defect
Frost resistance	BS EN ISO 10545-12	Frost proof	Frost proof
Resistance to chemicals	BS EN ISO 10545-13	No visible effect	No visible effect
Resistance to stain	BS EN ISO 10545-14	Manufacturer to state class	Stains removed Min. Class 2
Colour resistance	BS EN ISO 10545-16	No damage	No damage
Colour resistance to UV Light	DIN 51094	No change in color	No change in color
Scratch hardness(MOH's Scale)	EN 101	≥ 6 MOHS	≥ 7 MOHS
Surface quality	BS EN ISO 10545-2	Min. 95%	No visible defect
Skid resistance (friction co-efficient)	BS EN ISO 10545-17	> 0.4	>0.4
Moisture Expansion	-	Nil	Nil

SIZE	80x160
THICKNESS	9mm
WEIGHT / BOX (KG)	56
PIECES (BOX)	2
BOXES IN PALLET (H) horizontal, (V)vertical	28x17 (V)
PALLET / CONTAINER	17 - 20 Feet
BOXES IN CONTAINER	476
m2 IN BOX	2.56
m2 IN 20 H'C CONTAINER	1218.56
TOTAL WEIGHT IN CONTAINER	26800

AN
ISO
CERTIFIED
COMPANY



Corporate Office:

UNICO TILES PVT. LTD.

6 - Shakti Industrial Estate, Gujarat Gas Office Lane,
Behind Shakti Chambers - 1, 8-A, National Highway,
Morbi - 363 642 (Guj.) INDIA. Ph.: 02822 - 244141

Cell & WhatsApp: +91 98250 35219 | +91 78 78 44 66 77

 unicotiles

✉ info@unicotiles.com | export@unicotiles.com

🌐 www.unicotiles.com | www.unicosanitaryware.com | www.unicostone.in

Follow us On:    